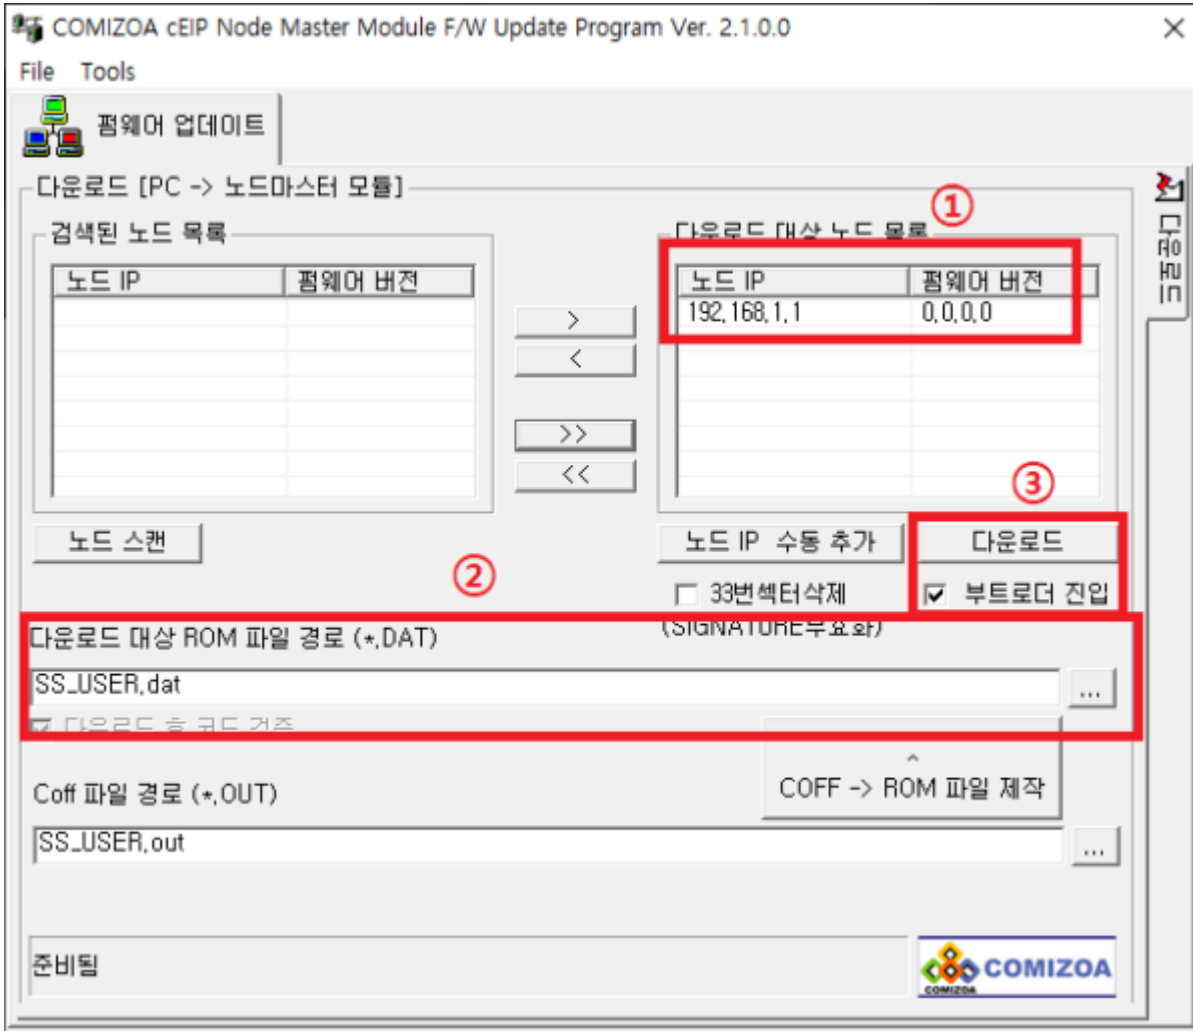

0.		1
1.	IP	2
2.	dat	2
3.		2

cEIP



x cEIP



ceNM-IP : **CEIP**

ceNM-SE : 가

- 0.
- cEIP c6711PowerFlasher.exe ¹⁾
 - PowerFlasher가 PC cEIP Ethernet²⁾

1. IP

- cEIP IP ³⁾ .
- 192.168.1.1 .

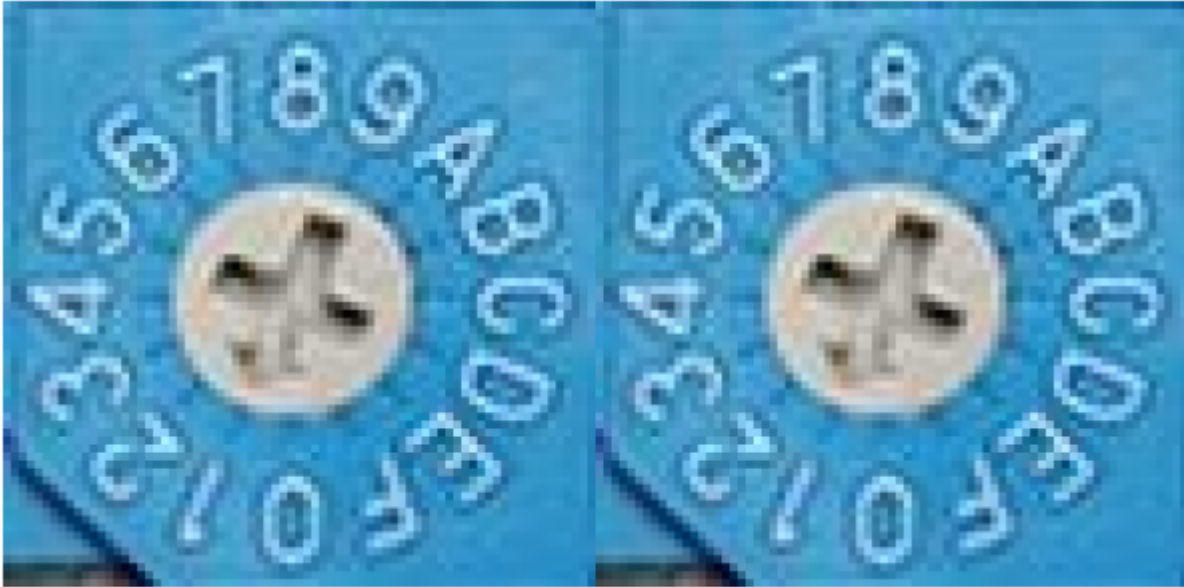
2. dat

- PowerFlasher.exe dat .
- FW

3.

- ⁴⁾⁵⁾ .
- 가 , 가
⁶⁾ .

-
- 가 ping ping 가



'MSB:0xF, LSB:0xF' 가 . 가 가

1. IP 0xF, 0xF
2. 가
3. 5
4. (ex.MSB:0x0, LSB:0x1 -> 192.168.1.1)
5. (가)
6. Act LED, Err LED 500ms (가)
Act LED 500ms)

- 1) cEIP Core PC .
- 2) RJ-45
- 3) cEIP .
2. Firmware Reset
- 4)
- 5) Act LED 500ms , Act,Err LED가 500ms
- 6) 가 가 가

From:
<http://comizoa.com/info/> - -
 Permanent link:
http://comizoa.com/info/doku.php?id=faq:comiapp:fwupdater:02_ceip&rev=1656481933
 Last update: **2024/07/08 18:22**