

**Case 1.** ..... 1  
..... 1  
..... 1  
**Case 2.** ..... 1  
..... 1  
    1 ..... 1  
    2 ..... 2  
**Case 3.** ..... 2  
..... 2  
    1 ..... 2  
    2 ..... 3  
**Case 4.** ..... 3  
..... 3  
..... 3

# C++

× MFC가

C++

.

× MFC가

C++  
가

가

## Case 1.

- ( ) . "stdafx.h"


```
#include "stdafx.h" //
```

- .

## Case 2.

- "const char\*" 형식의 값을 사용하여 "char\*" 형식의 엔터티를 초기화할 수 없습니다.

- 1
- - C/C++ - - -

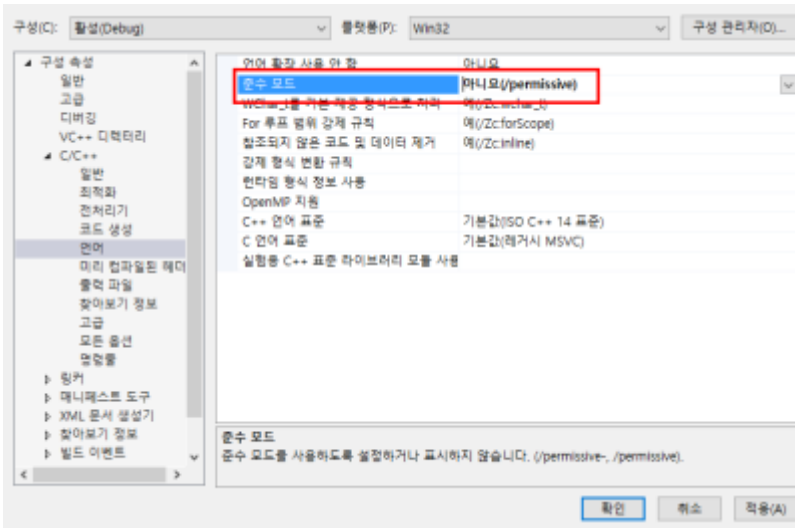

2

- char \*

```
(char *) "ecGn_LoadDevice", (FARPROC*)&ecGn_LoadDevices),
```

### Case 3.

- 식별자 "\_T"이(가) 정의되어 있지 않습니다.

1

- tchar.h Include

```
#include <tchar.h>
```

- 2
- \_T

## Case 4.

- BOOL, HANDLE

- Windows.h Include

```
#include <Windows.h>
```

From:

<http://comizoa.com/info/> - -

Permanent link:

[http://comizoa.com/info/doku.php?id=faq:downloadandsetup:cpp:01\\_library\\_modify&rev=1630564287](http://comizoa.com/info/doku.php?id=faq:downloadandsetup:cpp:01_library_modify&rev=1630564287)

Last update: **2024/07/08 18:22**