

Case 1. 1
..... 1
..... 1

Case 2. 1
..... 1
 1 1
 2 2

Case 3. 2
..... 2
 1 2
 2 3

Case 4. 3
..... 3
..... 3

Case 5. 3
..... 3
..... 3

C++

× MFC가

C++

.

× MFC가

C++
가

가

Case 1.

- () . "stdafx.h"


```
#include "stdafx.h" //
```

- .

Case 2.

- "const char*" 형식의 값을 사용하여 "char*" 형식의 엔터티를 초기화할 수 없습니다.

- 1
- - C/C++ - - -

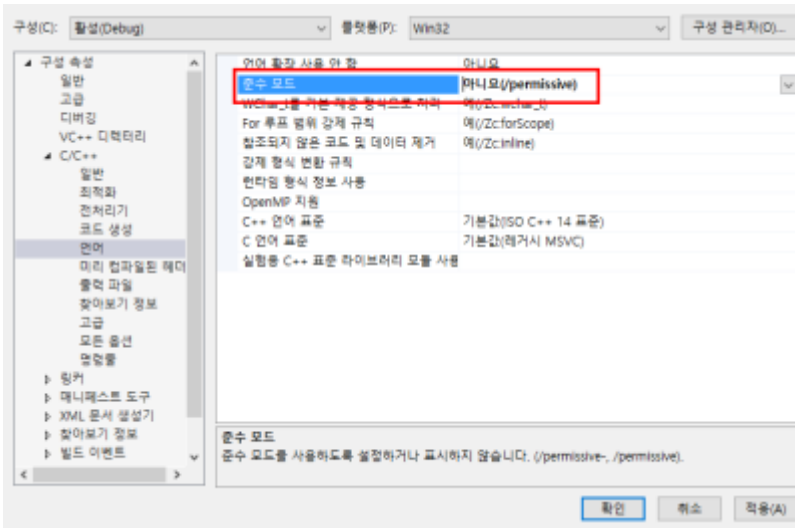

2

- char *

```
(char *) "ecGn_LoadDevice", (FARPROC*)&ecGn_LoadDevices),
```

Case 3.

- 식별자 "_T"이(가) 정의되어 있지 않습니다.

1

- tchar.h Include

```
#include <tchar.h>
```

- 2
- _T

Case 4.


- BOOL, HANDLE

- Windows.h Include

```
#include <Windows.h>
```

Case 5.

```
"const char*" 형식의 인수가 "LPCWSTR" 형식의 매개 변수와 호환되지 않습니다.
```

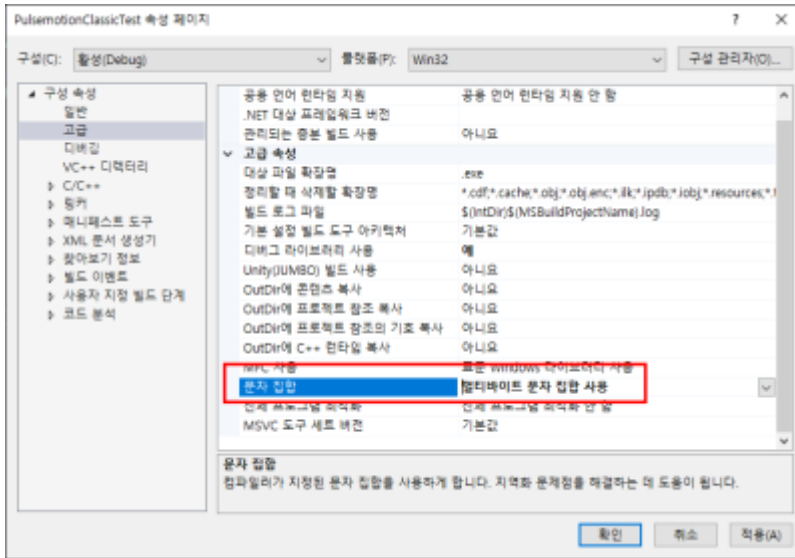

From:
<http://comizoa.com/info/> - -

Permanent link:
http://comizoa.com/info/doku.php?id=faq:downloadandsetup:cpp:01_library_modify&rev=1631664491

Last update: **2024/07/08 18:22**